



Signature

**PRIORITY DOCUMENT
TRANSMITTAL FORM**

First Named Inventor	Eddie Chang
Title	Audio Device with Retractable Earpieces
Serial No.	10/820,359
Filing Date	April 8, 2004
Date Allowed	
Examiner	
Group Art Unit	
Attorney Docket Number	EYIP/107/US
Date	May 5, 2004

Commissioner for Patents
United States Patent and
Trademark Office
P.O. Box 1450
Alexandria, Virginia 22313-1450


Sir:

SUBMISSION OF PRIORITY DOCUMENT

Applicant claims priority from Application No. 0308414.2 filed April 11, 2003 in the United Kingdom. A certified copy of the priority application is enclosed.

Respectfully Submitted,


Eddie Chang

By: 
Guy D. Yale
Registration No. 29,125
Alix, Yale & Ristas, LLP
Attorney for Applicant

Date: May 5, 2004
750 Main Street, Suite 1400
Hartford, CT 06103-2721
(860) 527-9211
Our Ref: EYIP/107/US

CERTIFICATE OF MAILING

I hereby certify that this correspondence is being deposited on the date below with the United States Postal Service as first class mail in an envelope addressed to "Commissioner for Patents, United States Patent and Trademark Office, P.O. Box 1450, Alexandria, Virginia 22313-1450."

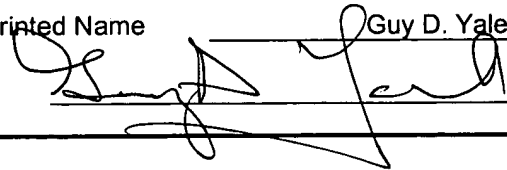Typed or Printed Name Guy D. Yale
Signature 

Reg. No. 29,125
Date: May 5, 2004



THIS PAGE BLANK (USPTO)



INVESTOR IN PEOPLE

The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed 

Dated 14 April 2004



no. 122

Patents Form 1/77

Patents Act 1977
(Rule 16)THE PATENT OFFICE
OF

11 APR 2003

The
Patent
Office11APR03 E799718-1 002835
P01/7700 0.00-0308414.2**Request for grant of a patent**

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

The Patent Office

Cardiff Road
Newport
South Wales
NP9 1RH

1. Your reference

RFB/P202636

2. Patent application number

(The Patent Office will fill in this part)

0308414.2

11 APR 2003

3. Full name, address and postcode of the or of each applicant (underline all surnames)MAN NIN SHING COMPANY LIMITED
UNITS A & C, 2ND FLOOR, LEROY PLAZA, 15
CHEUNG SHUN STREET, CHEUNG SHA WAN,
KOWLOON, HONG KONG

Parents ADP number (if you know it)

If the applicant is a corporate body, give the country/state of its incorporation

HONG KONG

8609497001

4. Title of the invention

AUDIO DEVICE WITH RETRACTABLE EARPIECES

5. Name of your agent (if you have one)

URQUHART-DYKES & LORD

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

TOWER HOUSE, MERRION WAY, LEEDS LS2 8PA

Parents ADP number (if you know it)

1644004

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country

Priority application number
(if you know it)Date of filing
(day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing
(day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer "Yes" if:

YES

- a) any applicant named in part 3 is not an inventor, or
 - b) there is an inventor who is not named as an applicant, or
 - c) any named applicant is a corporate body.
- See note (ii))

BEST AVAILABLE COPY

Patents Form 1/77

0066130 11-Apr-03 05:02

Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form

Description 3
 Claim(s) 1
 Abstract 1
 Drawing(s) 3 only

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77)

Request for preliminary examination and search (Patents Form 9/77)

Request for substantive examination (Patents Form 10/77)

Any other documents (please specify)

11.

I/We request the grant of a patent on the basis of this application.

Signature

Date

12. Name and daytime telephone number of person to contact in the United Kingdom

ROBIN F BROWNE
 TEL: 0113 2452388

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

BEST AVAILABLE COPY

Patents Form 1/77

0066130 11-Apr-03 05:02

-1-

AUDIO DEVICE WITH RETRACTABLE EARPIECES

This invention relates to an audio device, particularly if not exclusively to a portable audio device including a pair of earphones or earpieces connected to a body by spoolable lead wires, so that the wires may be retracted onto a spool contained within the
5 body of the device.

In previous devices the circuit components have been located on the spool to rotate with the spool as the earplugs are deployed or retracted. This facilitates connection of the circuit to the lead wires but results in a bulky spool assembly. An alternative arrangement wherein the lead wires extend from the rotatable spool to a fixed circuit gives
10 rise to a risk of fracture of the wires due to twisting as the spool rotates.

According to the present invention an audio device comprises a casing containing a circuit and a spool rotatable about an axis, two earpieces connected by lead wires, the lead wires being wound onto the spool so that the earpieces are deployed or retracted as the spool rotates,
15 the spool including two concentric circular tracks each track being connected to a respective lead wire, a contact within the casing being each arranged to engage a respective track as the spool rotates to connect the earpieces to the circuit.

The device may comprise a radio tuner, MP3 player or disc or cassette player in
20 which the spool is disposed within the body housing the electronic and other components. In a preferred embodiment the device comprises an FM scan radio. Alternatively, the spool may be located in a casing separate from the main body together with a receiver, adapted to receive a signal generated by the primary circuitry in the main body.

In a preferred embodiment the tracks are located at inner and outer radii having an
25 annular space between the tracks.

BEST AVAILABLE COPY

-2-

The spool preferably comprises an axial spindle and a radially extending end plate carrying the circular tracks.

The contacts are preferably biased towards the tracks and may comprise resilient metal leaves or other members. Alternatively, the contacts may comprise brushes or pads urged towards the tracks by spring means.

In preferred embodiments the contacts engage the plate carrying the circular tracks on a diameter thereof at different radii.

In preferred embodiments the spool includes a spring to retract the earpieces from an extended position to a stowed position.

The spool may comprise a rotatable drum to receive the wires and a fixed base plate.

The invention is further described by means of example but not in any limitative sense with reference to the accompanying drawings of which:

Figure 1 is two perspective views of an audio device in accordance with the invention;

Figure 2 is an exploded view of the device shown in Figure 1; and

Figure 3 illustrates the tracks and contacts shown in Figure 1.

Figure 1 shows two perspective views of an FM scan radio in accordance with the present invention. The casing consists of an upper shell 2 and a lower shell 17. The upper shell 2 includes a transparent cover lens 1 to display an information sheet or publicity material.

Earpieces 5, 7 are mounted on the ends of lead wires 4, 6 and may be drawn away from the casing against the restoring force of a spring. A clip 22 allows the device to be attached to a user's clothing.

BEST AVAILABLE COPY

-3-

Figure 2 is an exploded view of the assembled components. The lower casing 17 contains an integrated circuit board 14 carrying the components of the tuner or other electronic circuit. The batteries 20 are retained by a cover 21 in a compartment in the casing 17. Control buttons 15, 18 and slide knob 13 actuate the tuner.

5 A circular plate 12 having an axial spindle 23 includes two slots which receive copper contact strips 11 by wires 24. The contact strips take the form of resilient leaves or plates which are electrically connected to the circuit 14. A circular plate 10 having an axial bore to receive the spindle 23 of plate 12 has two concentric annular conductive tracks 25, 26 at different radii on the surface. The contacts 11 are at the same radii from the axis of
10 plate 12 so that each contact 11 engages and makes permanent electric contact with the respective circular contact track 25, 26 on plate 10.

A spool 8 mounted on the spindle 23 engages one end of spiral spring 9, the other end of the spring being secured to casing 17. Earpieces 5, 7 are connected to the plate 10 by lead wires 4, 6 wound around the spool 8.

15 When a user pulls the earpieces 5, 7 from the casing rotation of the spool tightens the spring 9. This provides a restoring force to retract the earpieces when they are released.

The lead wires 4, 6 are both stowed on spool 8, providing a compact and reliable arrangement.

Figure 3 illustrates the contact arrangement in greater detail. Figure 3 shows the
20 underside of the circular plate 10 having two concentric contact tracks 25, 26 on the surface with an insulating space 27 between them. Contact 11a and 11b, formed from resilient copper leaves are formed so that their ends 28 contact the tracks at different radii on a diameter of the plate 10. A constant electrical contact between the wires 24 and earpiece leads 4, 6 is maintained at all positions during rotation of the plate 10 and tracks
25 25, 26. The contacts 11 may be S shaped or otherwise deformed towards the tracks 25, 26 so that only the ends 28 contact the tracks.

BEST AVAILABLE COPY

~~4~~

CLAIMS

1. An audio device comprising a casing containing a circuit and a spool rotatable about an axis, two earpieces connected by lead wires,
the lead wires being wound onto the spool so that the earpieces are deployed or
5 retracted as the spool rotates,
the spool including two concentric circular tracks each track being connected to a respective lead wire,
a contact within the casing being each arranged to engage a respective track as the spool rotates to connect the earpieces to the circuit.
- 10 2. An audio device as claimed in claim 1 wherein the tracks are located at inner and outer radii having an annular space between the tracks.
3. An audio device as claimed in any preceding claim wherein the spool comprises an axial spindle and a radially extending end plate carrying the circular tracks.
- 15 4. An audio device as claimed in any preceding claim wherein the contacts are biassed towards the tracks.
5. An audio device as claimed in any preceding claim wherein the contacts are biassed towards the tracks.
6. An audio device as claimed in any preceding claim wherein the contacts engage the tracks on a diameter thereof at different radii.
- 20 7. An audio device as claimed in any preceding claim wherein the spool comprises a rotatable drum receiving the wires and a fixed base plate.
8. An audio device as claimed in any preceding claim wherein the spool includes a spring to retract the earpieces from an extended position to a stowed position.

BEST AVAILABLE COPY

-5-

ABSTRACT

An audio device comprising a casing containing a circuit and a spool rotatable about an axis, two earpieces connected by lead wires,

the lead wires being wound onto the spool so that the earpieces are deployed or retracted as the spool rotates,

the spool including two concentric circular tracks each track being connected to a respective lead wire,

a contact within the casing being each arranged to engage a respective track as the spool rotates to connect the earpieces to the circuit.

BEST AVAILABLE COPY

THIS PAGE BLANK (USPTO)

-1/3-

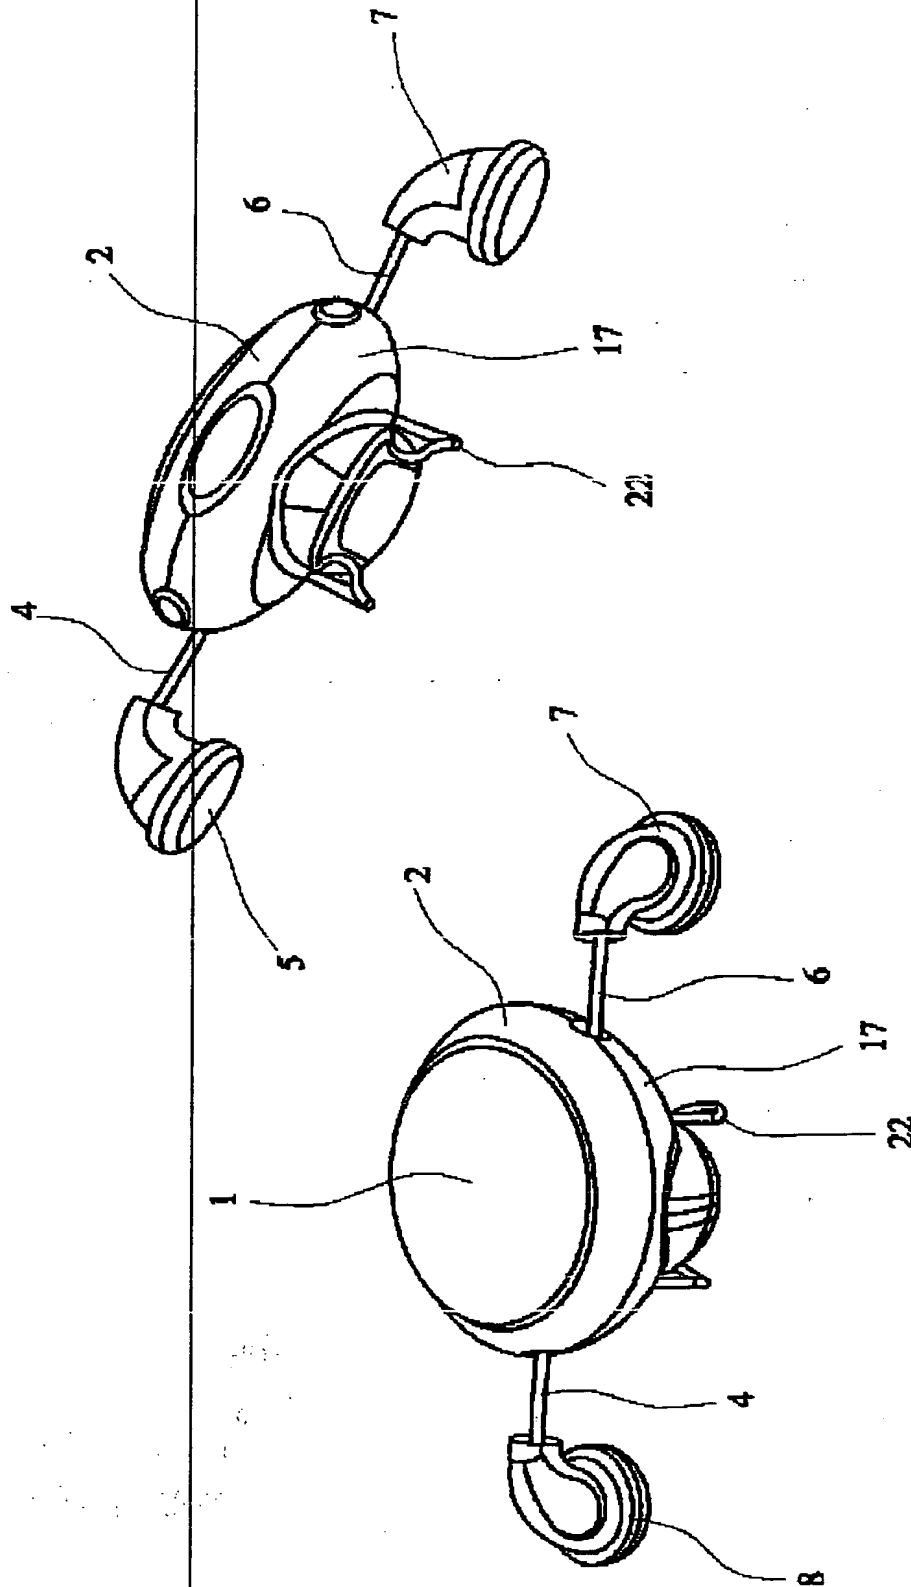


FIG. 1

BEST AVAILABLE COPY

THIS PAGE BLANK (USPTO)

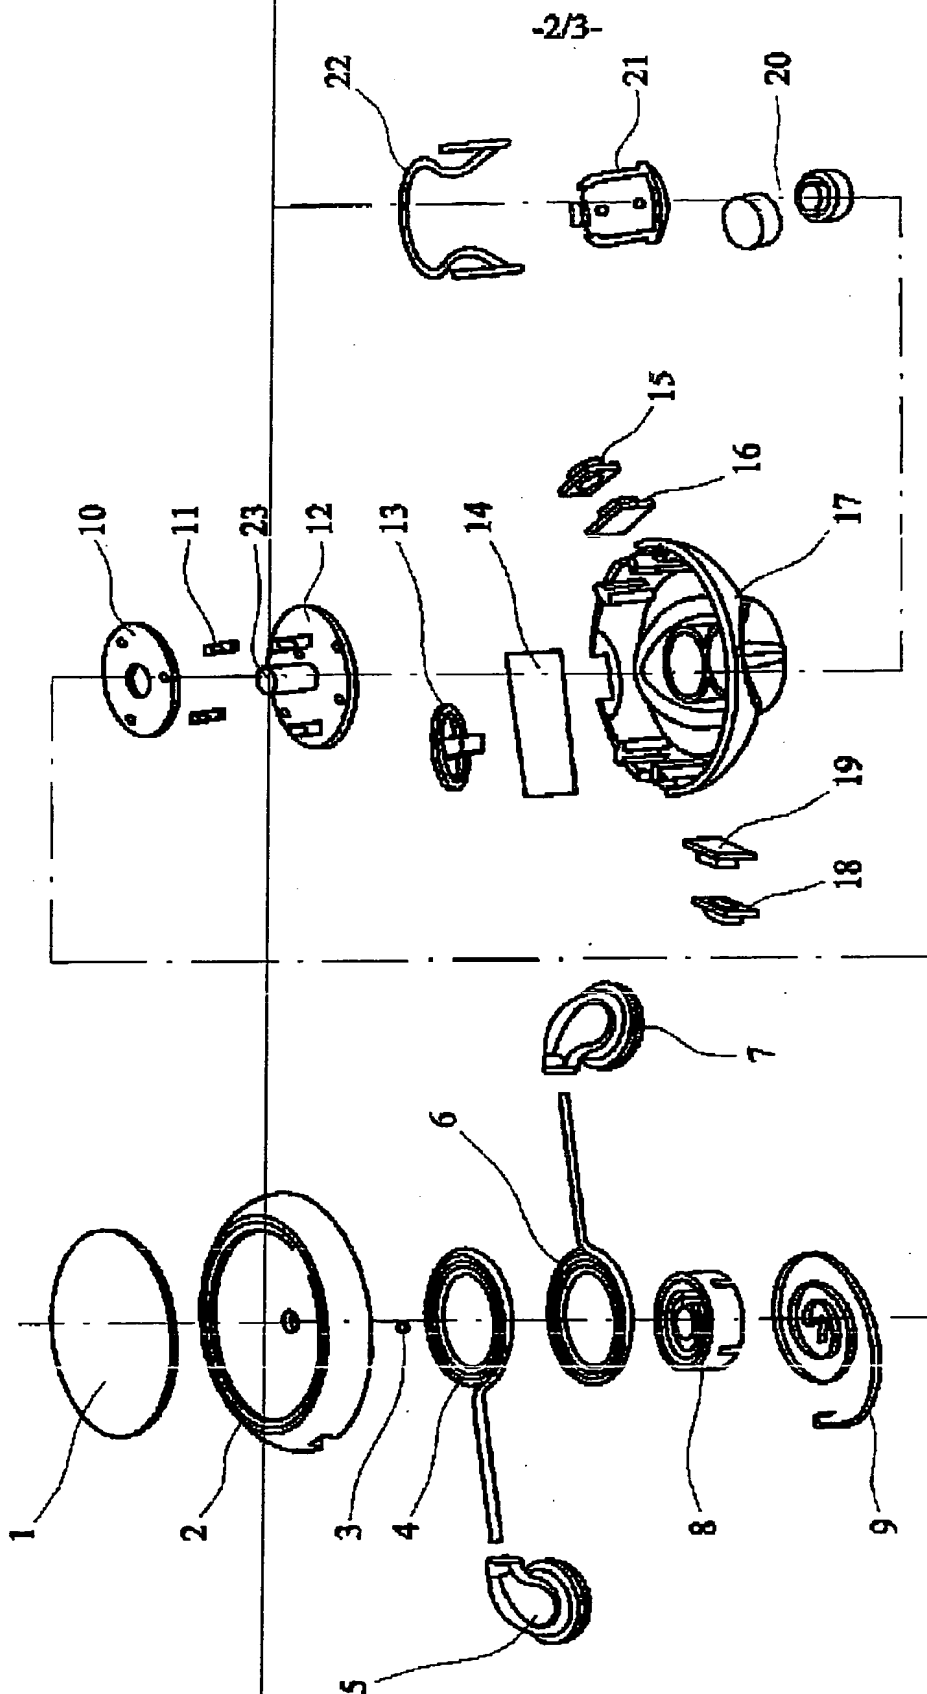


FIG. 2

BEST AVAILABLE COPY

THIS PAGE BLANK (USPTO)

-3/3-

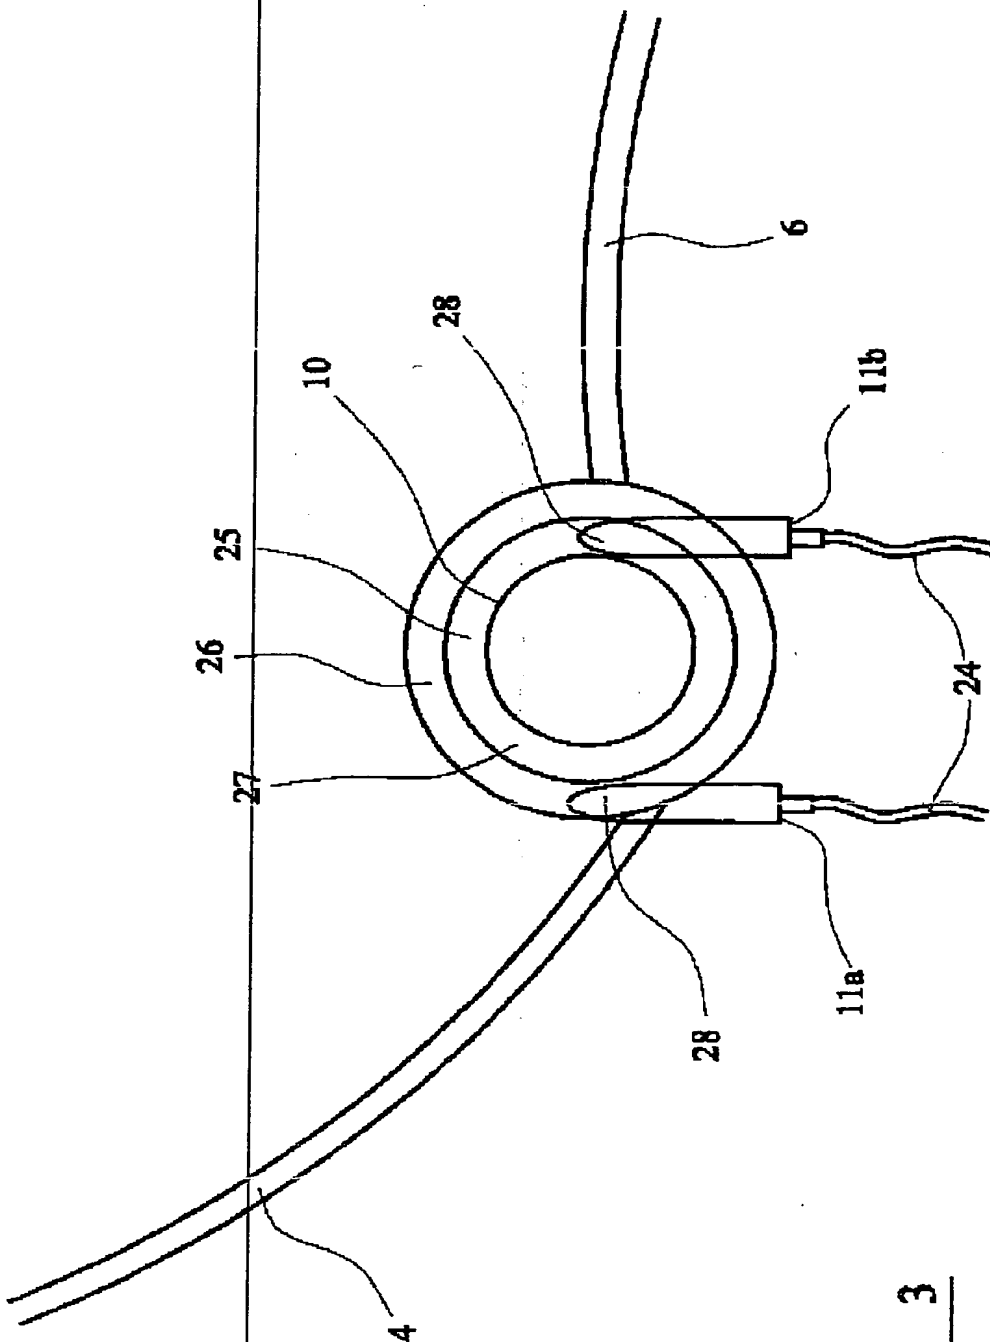


FIG. 3

BEST AVAILABLE COPY

THIS PAGE BLANK (USPTO)